

Acoustic-CompactPanel®

The ready-made design panel



... when it matters!



Acoustic-CompactPanel®

The ready-made design panel

The design surface with excellent absorption values

The Acoustic-CompactPanel® is a member of the successful Acoustic-Compact family. It stands for exceptional design, combined with a lot of possibilities in the demanding and fast paced interior décor designs. The Acoustic-CompactPanel® is on one hand available as a ready-made panel of a fixed format including edge processing and on the other hand as slat with a covering width of 192 mm and a longitudinally milled tongue and groove profile. Through this profile, the slat joint appears like one of the visible slots. This way an esthetically pleasing surface area is generated.

As a carrier an MDF plate is used, which is slotted in various versions on the visible side and drilled at the rear. The surface and edge finish is freely selectable – a colored lacquering according to RAL/NCS is possible, but also a design with real wood veneer, a melamine surface or an HPL coating. A particular highlight of our Acoustic-CompactPanel® is the excellent absorption with alpha-w values of up to 0.75.



Design possibilities

Acoustic-CompactPanel® offers a lot of design possibilities for walls (vertical and horizontal) and ceilings.



Very high absorption performance

Excellent absorption in all frequency ranges with an alpha-w value of up to 0.75.

Acoustic-CompactPanel®

Panels	max. 3000 mm (118.1") x 1240 mm (48.8"), other lengths on request
Slat	Length 2780 mm (109.5"), other lengths on request, slat width 192 mm (7.6", visible width)
Surface	HPL or melamine coating, real wood veneer or lacquered according to RAL/NCS
Carrier plate	MDF

Richter

akustik & design GmbH & Co. KG

St.-Annener-Str. 117 · DE-49326 Melle

Tel.: +49 5428 9420-0 · Fax: +49 5428 9420-30

www.richter-akustik-design.de · info@richter-akustik-design.de

Acoustic-CompactPanel®


Slat
visible width 192 mm
(7.6")




Acoustic-CompactPanel®

Panels
max. 3000 mm (118.1") x
1240 mm (48.8")

Slotting
SC200090

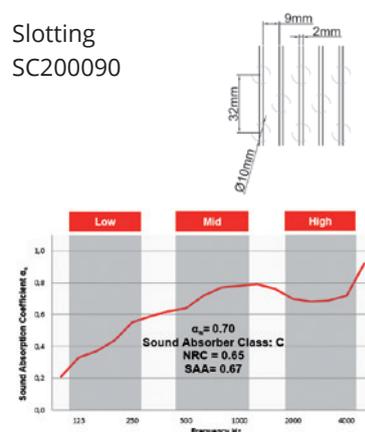

Slotting
SC200140

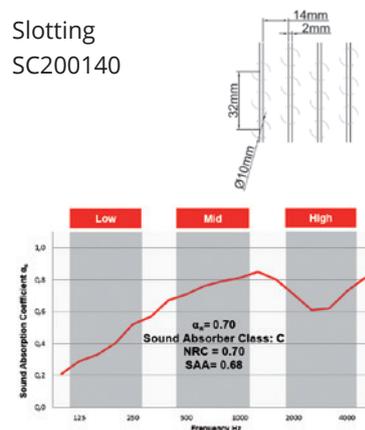

Slotting
SC300130

